

ACCESSORIES

TP2 TOP PIVOT



TP1A2 TOP PIVOT



DOOR PART OF TOP PIVOT SET



PDC100W CP Stainless steel COVER PLATE



PDC100W FPCP FIXING PLATE with stainless steel cover

**NHN® PDC200W SERIES**

*Now with a more compact body,
perfectly suited for narrow frame doors.*



The NHN PDC-200W pivot closers are suitable for timber, aluminium and steel doors.

Incorporating the latest cam type technology, the NHN PDC-200W pivot closers offer easy opening with increased efficiency on the closing torque.

The closing speed is easily adjusted via two independent adjustment valves.

Available with or without hold open at 90°.

The PDC200W series features a more compact body compared to conventional models, making it suitable for installation on narrower frame doors.

Easy installation; costs and time saving as no preparation on the floor needed.

5 year Guarantee against faulty workmanship.

FEATURES

- Suitable for double action doors, maximum 1000 mm wide and a maximum weight of 100 kg.
- Quick and easy installation.
- Low opening resistance and high closing efficiency
- Simple final adjustments, 3mm backward / forward, 3mm left / right, $\pm 4^\circ$ alignment.
- Ambient temperature $-20^\circ\text{C} - +40^\circ\text{C}$.
- Cover plates in satin stainless steel as standard. Polished stainless steel available.
- Complete with top pivot set.



6TH FLOOR, MARUTAKE HONMACHI BLDG.
HONMACHI 1-6-18 CHUO-KU OSAKA 541-0053 JAPAN

Phone: +81-6-6265-1130~1

Fax: +81-6-6265-1132

E-Mail: info@kenwa.co.jp <http://www.kenwa.co.jp>

E.&O.E.

All sizes, photo's and drawings are subject to change without prior notice.
Copyright © 2013 KENWA CO., LTD. OSAKA JAPAN All Rights Reserved.

DISTRIBUTED BY



D & E Architectural Hardware
L I M I T E D

SELECTION CHART / FUNCTION & ADJUSTMENT

Model No.	Function	Max. door width	Max. door weight	Max. opening angle
PDC203W(TP2)	Non-hold open	1000mm	100kg	150°
PDC203WS(TP2)	hold open 90°			
PDC203W(TP1A2)	Non-hold open			
PDC203WS(TP1A2)	hold open 90°			


It is recommended to use a door stop at 150° by the non-hold open models and at 90° by the hold open models.
Model PDC-203W (S) can only be installed on interior doors, not suitable for exterior doors or doors exposed to strong winds.

1

Double action

Non hold open model PDC203W:
Maximum opening angle 150°


Hold open model PDC203WS:
Hold open position angle 90°,
maximum opening angle 150°.

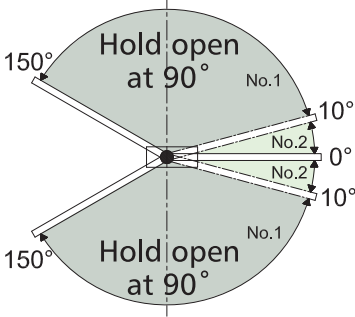

2


Two speed adjustment

Closing speed (150°~ 10°)
Latching speed (10°~ 0°)

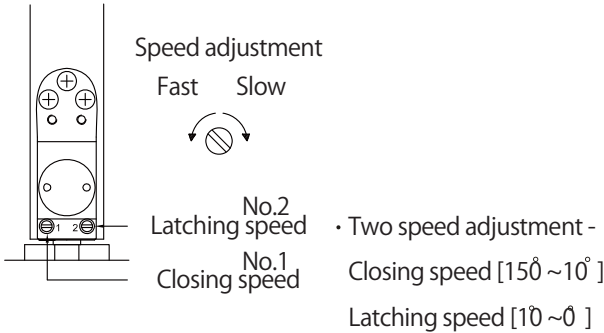

3



Providing over 70% efficiency, the NHN PDC200W combines light opening with smooth closing.

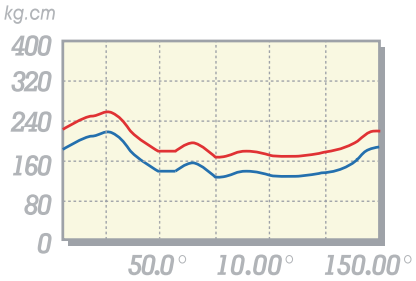

Shown curves refer to PDC200W

INSTALLATION

TP2 TOP PIVOT

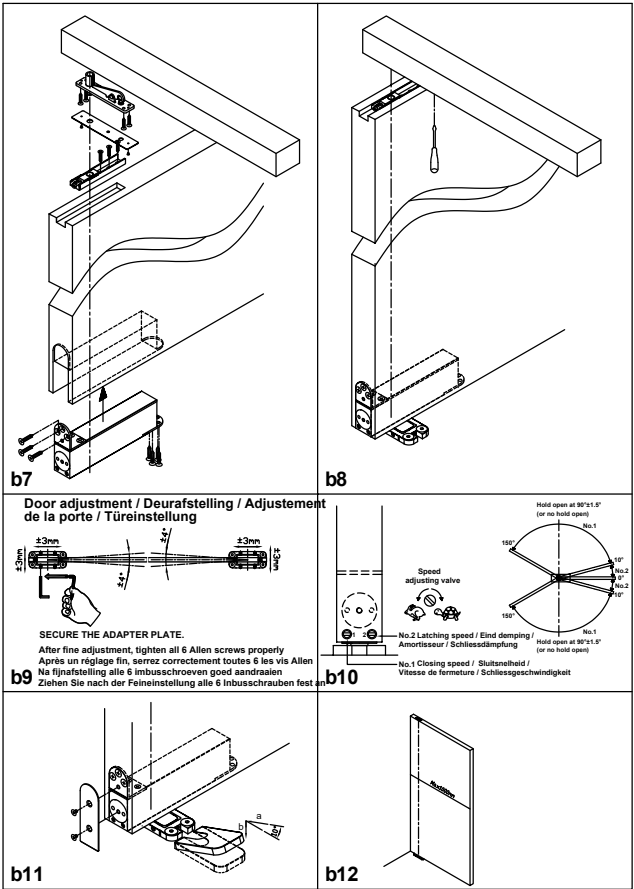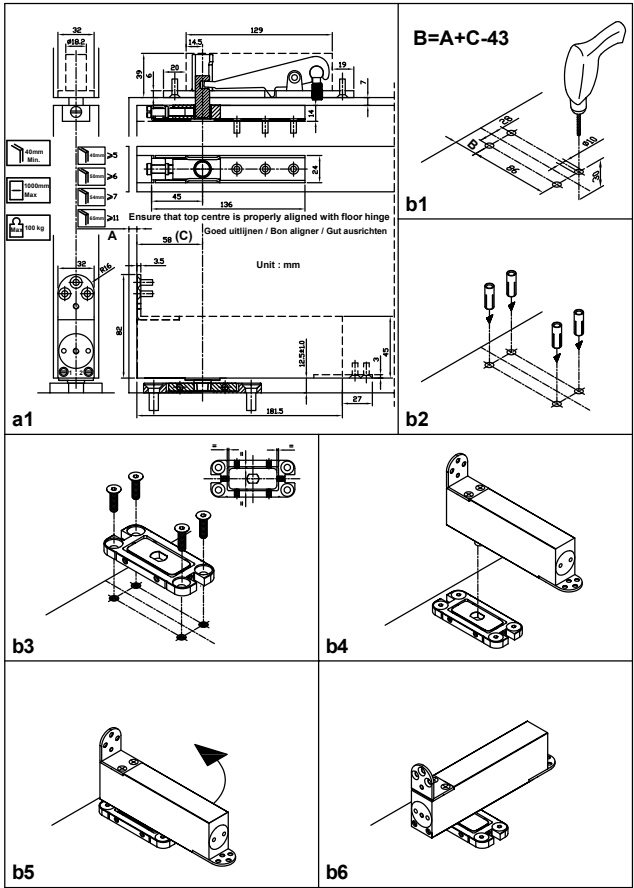

TP1A2 TOP PIVOT

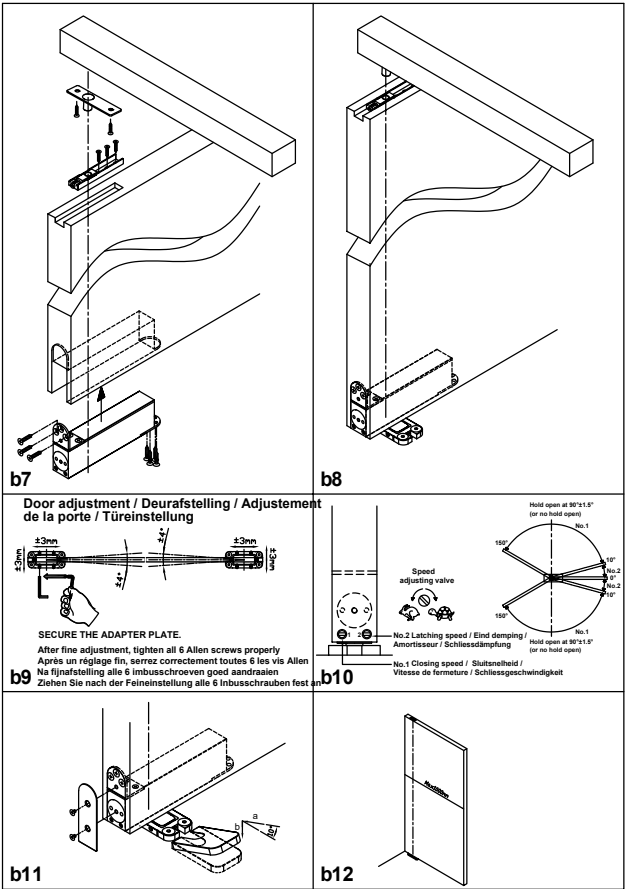
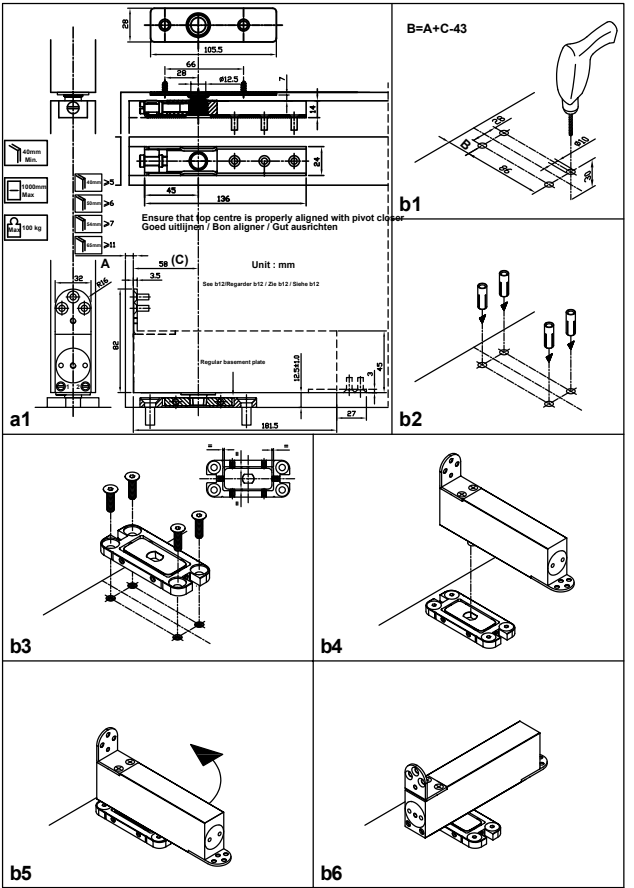


Illustration shows the installation of model PDC203W(S)
Hold open position angle 90°,
maximum opening angle 150°.