



KWS 6250..

Door stop with hold-back facility


KWS 6252..

Door stop with hold-back facility with additional release

for unrebated doors
emergency opening to the
outside, especially for toilet doors
in combination with door hinge
KWS 6206.. 6207.. 6208..

Mounting:

The mounting is effected on the door frame on the lock side. Please refer to the mounting drawing enclosed with the product for further information.

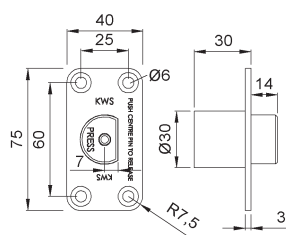

Standard design


Stainless steel

brushed	.82
---------	------------

unit	1 piece
------	---------

Piece weight

stainless steel	0.176 kg
-----------------	----------

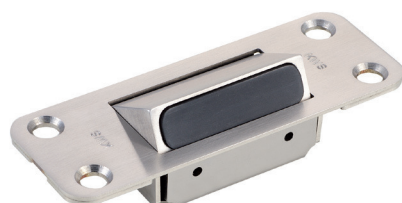


KWS 6251..

Door stop for depressing

for unrebated doors
emergency opening to the
outside, especially for toilet doors
in combination with door hinge
KWS 6206.. 6207.. 6208..

Mounting:

The mounting is effected on the door frame on the lock side. Please refer to the mounting drawing enclosed with the product for further information.

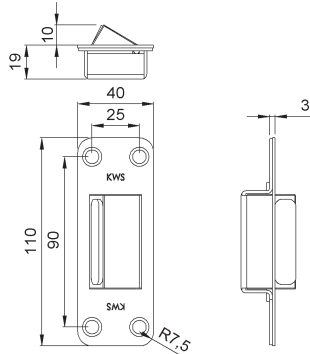

Standard design

Stainless steel

brushed	.82
---------	------------

unit	1 piece
------	---------

Piece weight

stainless steel	0.225 kg
-----------------	----------

Order example

Piece	Part no.	Finish no.
... Piece	KWS 6250	.82