



Art. no.	Article
82.8224	Drop-down support rail "A-Flex" with spring load
 	- for the washstand and WC area - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - flexible attachment and removal: with push-in holder for rapid fixing - with cover plate (160 x 160 mm) for concealed fixing - ease of action adjustable - note: can only be used in combination with support plate „A-Flex“ from the ErgoSystem® E300 series (available separately) - compatible with TECE-Gerontomodul or TECEprofil 9.042.016 - meets the requirements of DIN 18040, SIA 500, and ÖNORM B1600 - special lengths up to max. 900 mm also available on request Material: stainless steel cover plate: stainless steel Load-bearing capacity: internally tested up to 200 kg supports up to 60 kg of lateral load
	.6204 .6205
	.07041 L = 700 mm installation right (viewing direction to the washstand/WC)
	.07042 L = 700 mm installation left (viewing direction to the washstand/WC)
	.08541 L = 850 mm installation right (viewing direction to the washstand/WC)
	.08542 L = 850 mm installation left (viewing direction to the washstand/WC)
	.09041 L = 900 mm installation right (viewing direction to the washstand/WC)
	.09042 L = 900 mm installation left (viewing direction to the washstand/WC)



82.8224	Drop-down support rail with spring load and belt holder
 	- for the WC area - prepared to accommodate the retaining eyelets of support belt 82.8290.00011 - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - with cover plate (160 x 160 mm) for concealed fixing - ease of action adjustable - compatible with TECE-Gerontomodul or TECEprofil 9.042.016 - meets the requirements of DIN 18040, SIA 500, and ÖNORM B1600 - special lengths from 600 to 900 mm also available on request Material: stainless steel cover plate: stainless steel wall bracket: zinc die cast, black grey (RAL 7021) Load-bearing capacity: internally tested up to 200 kg supports up to 60 kg of lateral load
	.6204 .6205
	.08531 L = 850 mm installation right (viewing direction to the WC)
	.08532 L = 850 mm installation left (viewing direction to the WC)
	.09031 L = 900 mm installation right (viewing direction to the WC)
	.09032 L = 900 mm installation left (viewing direction to the WC)

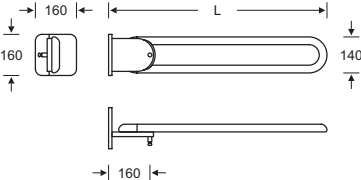