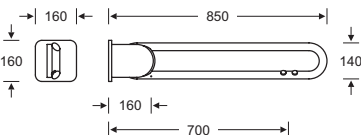
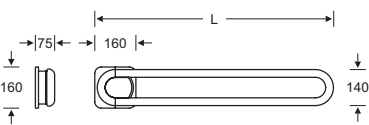


Art. no.	Article
82.8224	Drop-down support rail with spring load and LED function button
	- for the WC area - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - with cover plate (160 x 160 mm) for concealed fixing - ease of action adjustable - LED function button (red/white) features both a closer and opener function - cable routing with free cable end for wall connection - compatible with all standard concealed cisterns with electric control - compatible with TECE-Gerontomodul or TECEprofil 9.042.016 - meets the requirements of DIN 18040, SIA 500, and ÖNORM B1600 - available on request with a cable recess in the substructure for concealed cable routing
	Material: stainless steel cover plate: stainless steel wall bracket: zinc die cast, black grey (RAL 7021) function button: plastic Load-bearing capacity: internally tested up to 200 kg supports up to 60 kg of lateral load Technical data: spiral cable length (from outlet): 1.200 mm degree of protection: IP67 contact ratings: 32 V AC, 400 mA / 50 V DC, 100 mA contact resistance: max. 50 mΩ bounce time: 1 ms insulation resistance: 1 GΩ dielectric strength: 1.000 V AC actuation force: 3 N
	.6204 .6205
	.08513 installation right (viewing direction to the WC)
	.08514 installation left (viewing direction to the WC)
	

82.8224	Drop-down support rail with spring load, for side installation
	- for the washstand and WC area - for side installation (e.g. to reduce supply shaft widths for WC basins with a maximum projection of 550 mm) - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - with cover plate (160 x 160 mm) for concealed fixing - ease of action adjustable - with mounting material - meets the requirements of DIN 18040, SIA 500, and ÖNORM B1600
	Material: stainless steel cover plate: stainless steel wall bracket: aluminium, black grey (RAL 7021) Load-bearing capacity: internally tested up to 200 kg supports up to 60 kg of lateral load
	.6204 .6205
	.07021 L = 930 mm installation right (viewing direction to the washstand/WC)
	.07022 L = 930 mm installation left (viewing direction to the washstand/WC)
	.09021 L = 980 mm installation right (viewing direction to the washstand/WC)
	.09022 L = 980 mm installation left (viewing direction to the washstand/WC)
	