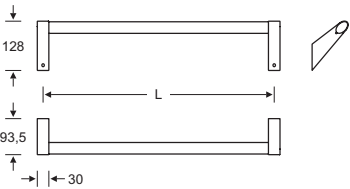
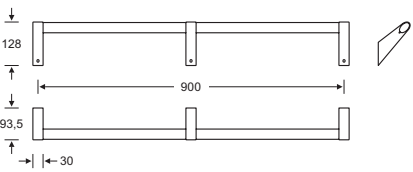



Art. no.	Article						
82.8401	Grab rail						
	- for the shower, bathtub, and WC area - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - with concealed support fixing using the mounting shoe principle and screw connection (M5 threaded bolt, with tolerance compensation ± 2 mm) - compatible with suspended seats (from L = 450 mm), shower rails, and storage trays from the ErgoSystem® A100 series - special lengths also available on request Material: aluminium, powder-coated supports: zinc die cast Load-bearing capacity: tested up to 100 kg						
	solid/combined (see p. 27) <table> <tr> <td>.00030</td><td>L = 300 mm</td></tr> <tr> <td>.00045</td><td>L = 450 mm</td></tr> <tr> <td>.00060</td><td>L = 600 mm</td></tr> </table> 	.00030	L = 300 mm	.00045	L = 450 mm	.00060	L = 600 mm
.00030	L = 300 mm						
.00045	L = 450 mm						
.00060	L = 600 mm						
82.8406	Grab rail with central support						
	- for the shower, bathtub, and WC area - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - with concealed support fixing using the mounting shoe principle and screw connection (M5 threaded bolt, with tolerance compensation ± 2 mm) - compatible with suspended seats, shower rails, and storage trays from the ErgoSystem® A100 series Material: aluminium, powder-coated supports: zinc die cast Load-bearing capacity: tested up to 100 kg						
	solid/combined (see p. 27) <table> <tr> <td>.00090</td><td>L = 900 mm</td></tr> </table> 	.00090	L = 900 mm				
.00090	L = 900 mm						
82.8402	Angled rail, 135 degrees						
	- for the shower, bathtub, and WC area - optimal grip and support: elliptical hand grip shape due to an oval tube (36,5 x 22 mm) angled at 45 degrees - with concealed support fixing using the mounting shoe principle and screw connection (M5 threaded bolt, with tolerance compensation ± 2 mm) - compatible with shower rails and storage trays from the ErgoSystem® A100 series Material: aluminium, powder-coated supports: zinc die cast						
	solid/combined (see p. 27) <table> <tr> <td>.05121</td><td>L₁ = 300 mm, L₂ = 512 mm, L₃ = 212 mm angled rail segment on the right</td></tr> <tr> <td>.05122</td><td>L₁ = 300 mm, L₂ = 512 mm, L₃ = 212 mm angled rail segment on the left</td></tr> </table> 	.05121	L ₁ = 300 mm, L ₂ = 512 mm, L ₃ = 212 mm angled rail segment on the right	.05122	L ₁ = 300 mm, L ₂ = 512 mm, L ₃ = 212 mm angled rail segment on the left		
.05121	L ₁ = 300 mm, L ₂ = 512 mm, L ₃ = 212 mm angled rail segment on the right						
.05122	L ₁ = 300 mm, L ₂ = 512 mm, L ₃ = 212 mm angled rail segment on the left						