

For steel doors, horizontal type

Door weight : 10-60kg

NSC-C60V


Highly reliable and cost effective self-closing solution for steel sliding doors.

Safe & long term operation guaranteed.

Simple to install, set up and use.

Features

- All parts required for horizontal installation on light steel door (e.g. guide rail, guide roller, stop device, etc.) are included in standard component.
- The product can be used for both left and right hand sliding doors and can be easily converted between left and right by simple adjustment.

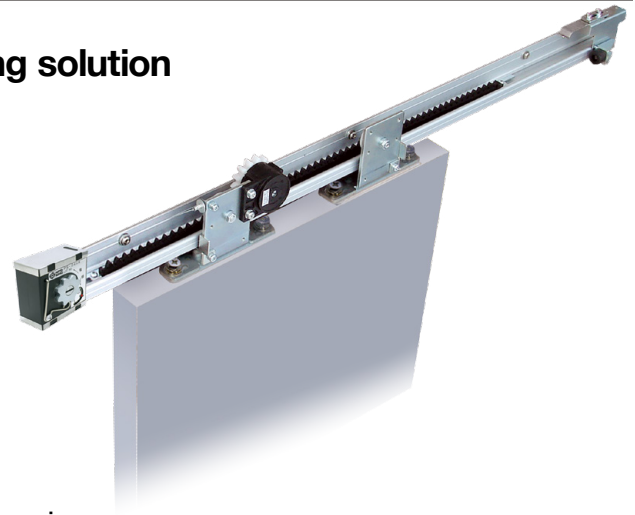


Specifications

right and left handed opening

Model		NSC-C60V-22	NSC-C60V-31
Applicable doors	Weight [kg]	10-60	
	Width [mm]	600-1,200	1,200-1,600
Max. stroke [mm]		1,500	
Closing drive system		Spiral spring type	
Controlling system		Fluid friction resistance type	
Controlling time		7-11 seconds (with a door-opening distance of 900mm)	
Initial opening force [N]		6.5 (Door weight 10kg), 8.9 (Door weight 60kg)	
Durability		More than half million open/close operations	
Control device		SC-C06V	
Pull spring		PS-04A	
Rail length [m]		2.2	3.1

Part details

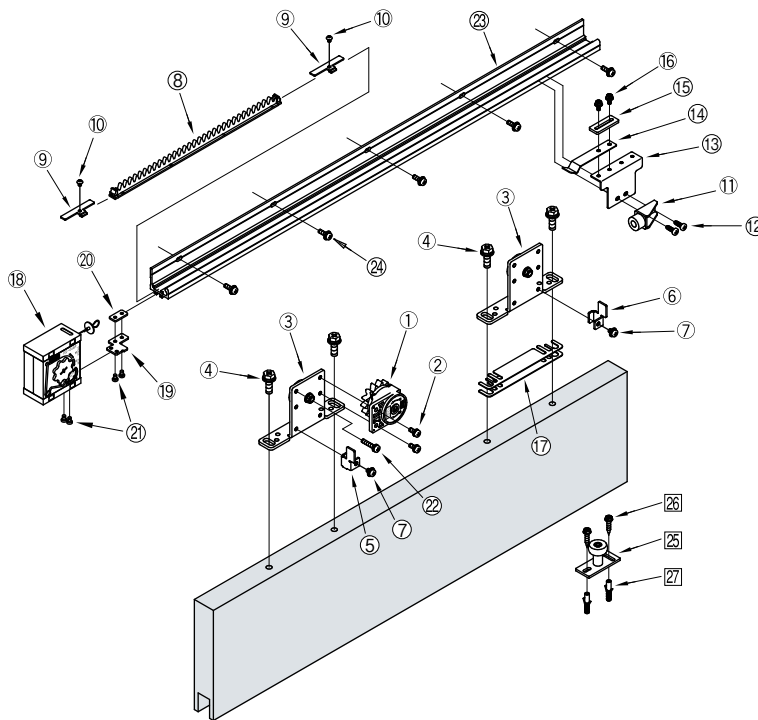

No.	Part	Q'ty	Remark
①	Control device	1	For control device
②	M5×12 pan head screw	2	
③	Hanger	2	For hanger
④	M8X25 cross recessed hexagon head screw	4	
⑤	Door retaining fitting Hanger L	1	Door retention
⑥	Door retaining fitting Hanger R	1	
⑦	M5×8 pan head screw	2	
⑧	Control rack	1	For control rack
⑨	Control rack fitting	2	
⑩	M4X5 hexagon socket button head screw	2	
⑪	Door stopper	1	For stop device
⑫	5x16 pan head drilling screw	2	
⑬	Plate spring bracket	1	For door stopper
⑭	Plate spring	1	
⑮	Stop force adjusting plate	1	
⑯	M4X10 cross recessed hexagon head screw	2	
⑰	Height adjusting plate (t = 1.0)	4	
⑱	Pull spring	1	For pull spring
⑲	Pull spring bracket	1	
⑳	Plate nut	1	
㉑	M4×6 pan head screw	4	
㉒	M5×25 pan head screw	1	
㉓	Rail L = 2200 [L = 3100]	1	For rail
㉔	M5×16 pan head screw	8[11]	
㉕	Guide roller *	1	For guide roller (Option)
㉖	φ5×25 Hexagon head tapping screw	2	
	M5×12 Hexagon head screw	2	
㉗	Fischer plug 6x30	2	

*4 types, φ5, φ25, φ30, φ35