


Model Number			Door Size Applicable(mm)			Door Weight (kg)	Closing Force (N·m)	Stop Mechanism	Location of Stop	Max. Opening Angle	Surface Color
Right hand door	Left hand door		W	H	D						
113R-PC	113L-PC		900(Max)	2100(Max)	30(Min)	40(Max)	15.0	—	—	180° Left or Right One-side Opening	Silver * Black * Bronze
113SR-PC	113SL-PC							○	85° & 150°		
Empty Hinge	110R-PC	110L-PC					—	—	—		


※ Optional Color



Remarks

1. Surface treatment is by a baked coating of acrylic resin.
2. For the flap mounts on the door and frame, be sure to use a steel plate at least 2.3mm thick and 300mm long made of luan or harder wood or reinforcement. Fix the reinforcement directly on the framework.
3. They come with mounting tapping screws 25mm long. Use a frame at least 25mm.
4. Allow for a door clearance of at least 5mm.
5. Always allow for a door stopper to prevent the door from opening wider than 180°.

EXTERNAL DIMENSIONS

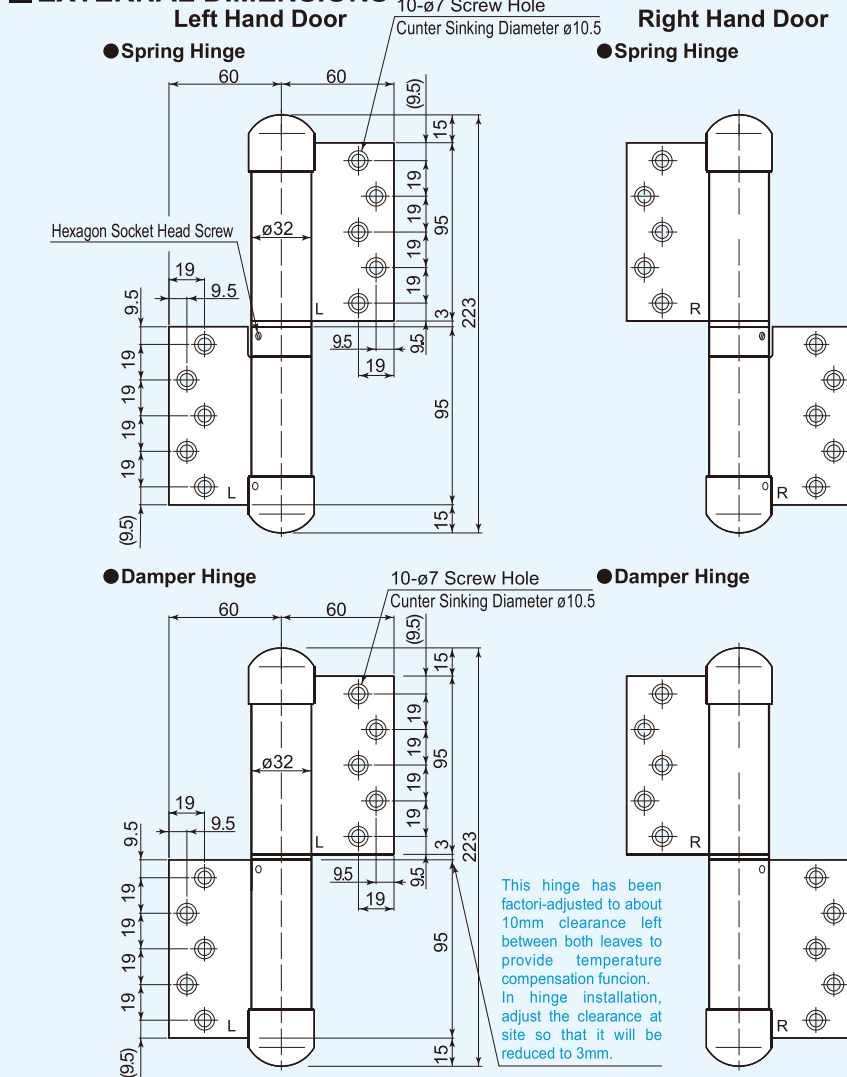

FITTING DIAGRAMS

