

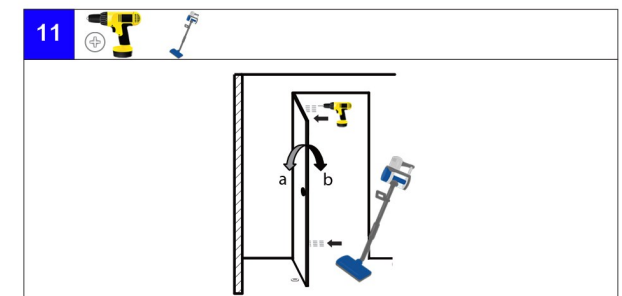
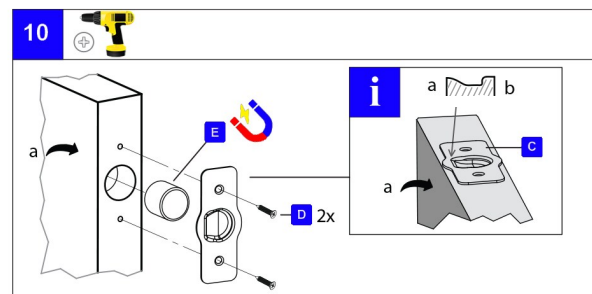
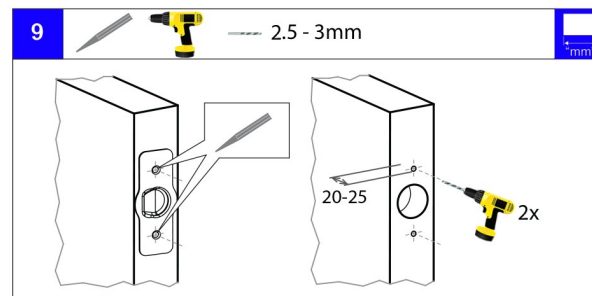
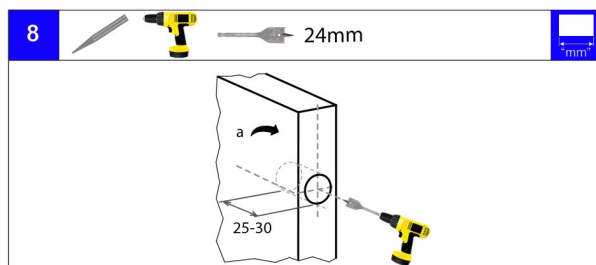
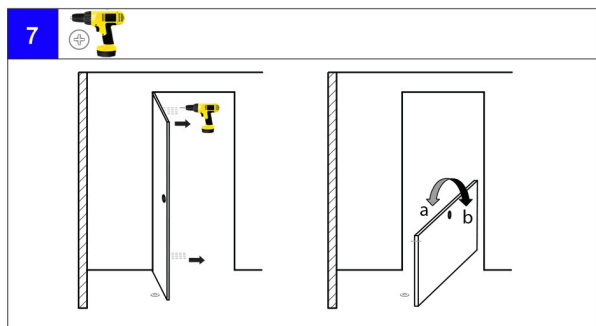
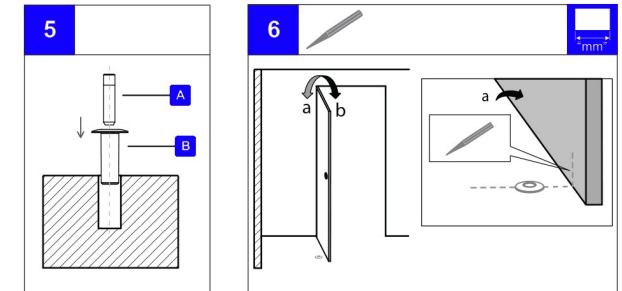
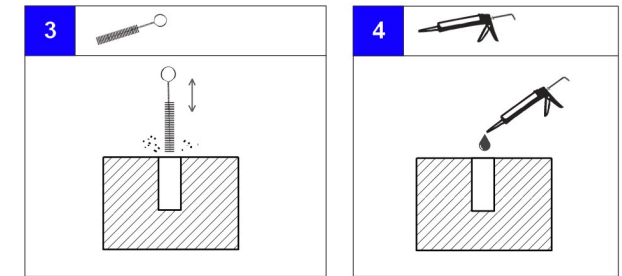
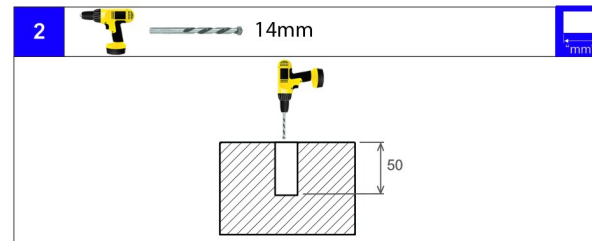


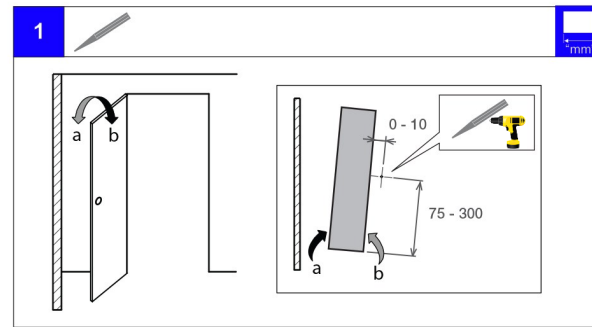

DEDF3016

D&E Concealed Flush Mounted Door Stop
With Magnetic Hold Open

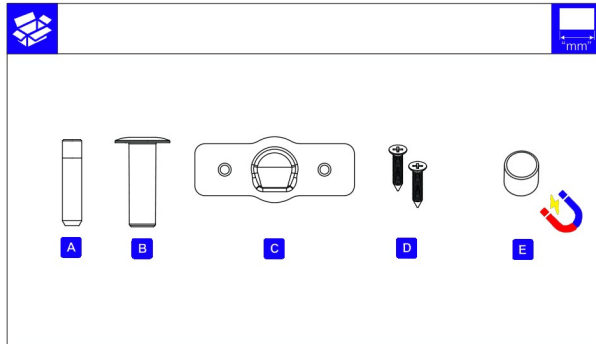

IMPORTANT INFORMATION

1. This item contains a powerful magnet. Avoid contact with metal objects prior to installation. Ensure to keep electronics and electrical equipment away from the magnet.

2. Carefully read the installation instructions in full prior to installation. Failure to follow the instructions risks damage to your floor and door.

3. The recommended gap under the door is 9mm to 10mm, the maximum being 15mm. If your doors are already installed and the gap exceeds 15mm, a 5mm spacer / packer may need to be fabricated to lower the striker plate 'C'.

Carpeted surfaces: Allow sufficient clearance of carpet thread and pile when drilling hole into floor to avoid wrapping or binding to drill bit.

Tiled surfaces: It is recommended to use a diamond coated drill bit to avoid chipping and damage of tiles.