



8143..

D	GL	H	Supports
Ø 20	from 200	70	Ø 20

8178..

Ø 25	from 200	75	Ø 25
------	----------	----	------

8179..

Ø 30	from 200	80	Ø 25
------	----------	----	------

8169..

Ø 35	from 200	85	Ø 25
------	----------	----	------

8180..

Ø 40	from 200	90	Ø 25
------	----------	----	------

8181..

Ø 50	from 200	100	Ø 25
------	----------	-----	------

As a pair for two-sided operation, or singly for one-sided door operation.

The appropriate mounting material is presented from Page 56.

From Ø 25 mm this door pull series is additionally available with three differing offset supports (see fig. following page):

support A - straight
support B - curved
support C - slanting 45°
support G - slanting on mitre joint

Standard design

Aluminium

coloured plastic-coated	.70
-------------------------	-----

Aluminium machined according to E 4

KWS 1 silver anodised	.22
KWS 2 nickel silver anodised	.23
KWS 3 gold anodised	.24
KWS 4 light bronze anodised	.27
KWS 5 dark bronze anodised	.28
KWS 6 black anodised	.29

brass

not for 8143.. 8169..


brushed and waxed	.61
polished and waxed	.65

stainless steel

brushed	.82
polished	.83

maximum centre to centre distance (without mid-point support)

D	Aluminium	brass	stainless steel
Ø 20	1000	-	1200
Ø 25	1400	1400	1600
Ø 30	1600	1600	1800
Ø 35	2000	-	2200
Ø 40	2200	2000	2500
Ø 50	2400	2400	2500

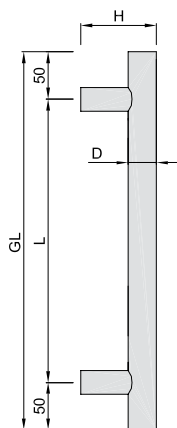

Order example

Piece	Part no.	Finish no.	Support	GL	L
... Piece	8143	.82	C	960	860


Door pull supports

for sufficient safety clearance

Especially in the case of panel doors you should ensure that the grip of a door pull is far enough from the door edge (at least 40 - 50 mm).


Support B curved support 90°

D2	D1	B	H
Ø 25	Ø 25	92,5	85
Ø 30	Ø 25	95	87,5
Ø 35	Ø 25	97,5	90
Ø 40	Ø 25	100	92,5
Ø 50	Ø 25	105	97,5

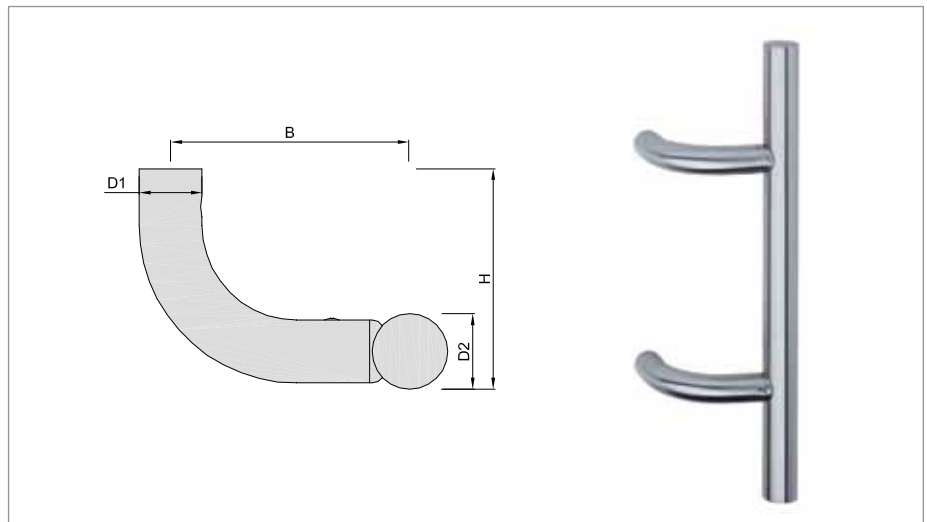

Support C slanting support 45°

D2	D1	B	H
Ø 25	Ø 25	67	85
Ø 30	Ø 25	69.5	90
Ø 35	Ø 25	72	95
Ø 40	Ø 25	74.5	100
Ø 50	Ø 25	79.5	110

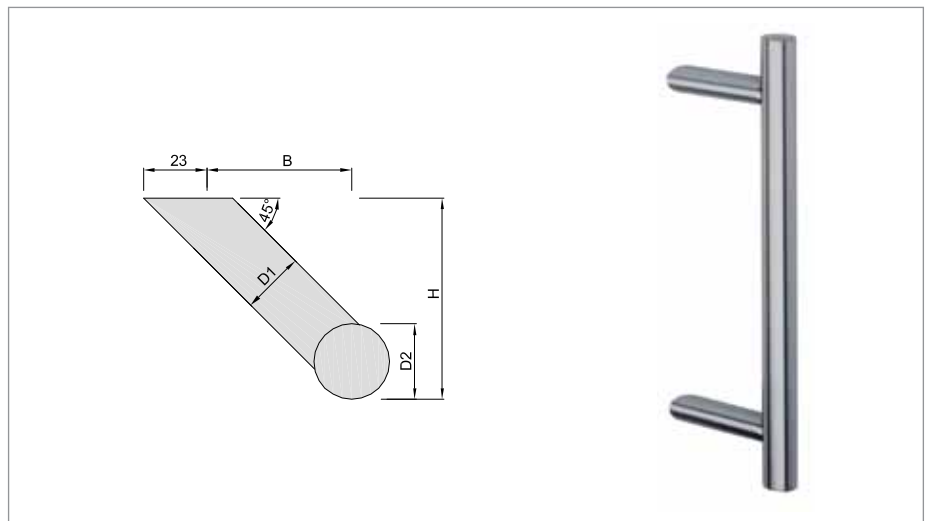

Support G support slanting on mitre joint
(only available in stainless steel)

D2	D1	B	H
Ø 25	Ø 25	92.5	75
Ø 30	Ø 25	95	80
Ø 35	Ø 25	97.5	85
Ø 40	Ø 25	110	90
Ø 50	Ø 25	115	100

