


Model Number			Door Size Applicable(mm)			Door Weight (kg)	Closing Force (N·m)	Stop Mechanism	Location of Stop	Max. Opening Angle	Surface Color
Right hand door		Left hand door	W	H	D						
1111R		1111L	850(Max)	2000(Max)	30(Min)	35(Max)	7.9	—	—	180° Left or Right One-side Opening	Silver
1111SR		1111SL						○	85°		Bronze
1121R		1121L						—	—		
1121SR		1121SL						○	85°		
1111FR		1111FL						○	85°~180° (Free stop)		Silver
1121FR		1121FR					○	Bronze			
Empty Hinge	1110R	1110L	850(Max)	2000(Max)	30(Min)	35(Max)	—	—	—	180° Left or Right One-side Opening	Silver
	1120R	1120L									Bronze




Remarks

1. The door and frame materials to which the hinge is to be fitted should be of hard wood such as lauan or harder.
2. The tapping screws supplied with the products for fitting are 25mm long. In case of using the hinges on the wooden frame, make sure that the frame is thicker than 25mm.
3. Allow at least 5mm of space between the outer edge of door and the frame.
4. Body material : Aluminum
Surface treatment :
Silver(anodic oxide coating)
Bronze(baked epoxy resin coating)


EXTERNAL DIMENSIONS

Left Hand Door

●Spring Hinge

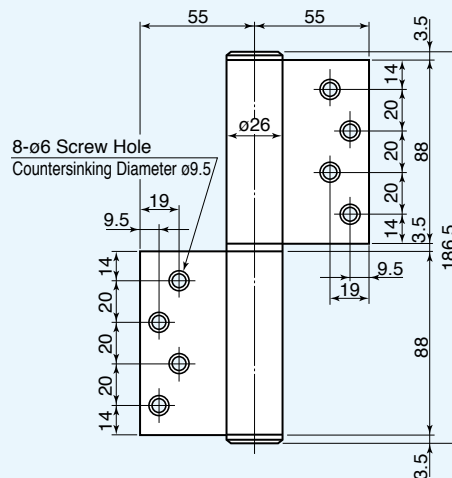


●Damper Hinge

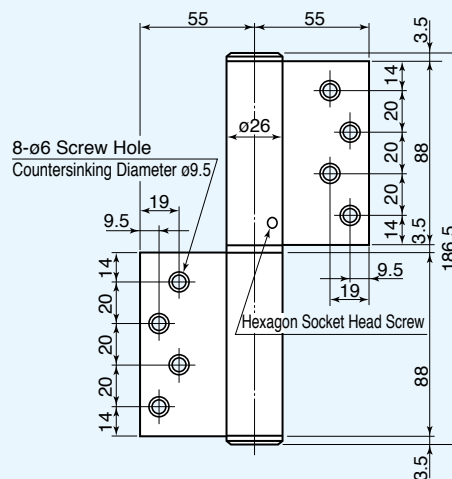


Right Hand Door

●Spring Hinge

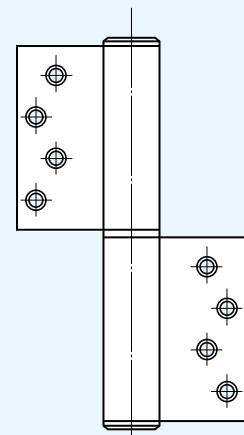

●Damper Hinge

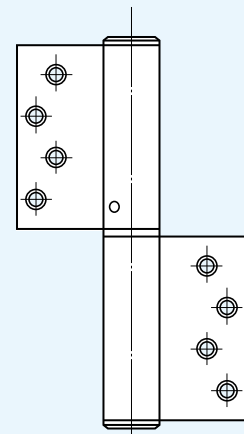

FITTING DIAGRAMS

