


Model Number			Door Size Applicable(mm)				Door Weight (kg)	Closing Force (N·m)	Stop Mechanism	Location of Stop	Max. Opening Angle	Surface Color			
Right hand door		Left hand door	W	H	D										
NK153R-SC		NK153L-SC	900(Max)	2100(Max)	8	10	12	60(Max)	15.0	—	—	180° Left or Right One-side Opening	Shine gray		
NK153SR-SC		NK153SL-SC								○	85° & 150°				
Empty Hinge	NK150R-SC	NK150L-SC							—	—	—				
NK153R TRISET-SC		NK153L TRISET-SC	1000(Max)	2200(Max)	8	10	12	80(Max)	20.0	—	—				
NK153SR TRISET-SC		NK153SL TRISET-SC								○	85° & 150°				
Empty Hinge	NK150R-SC	NK150L-SC							—	—	—				

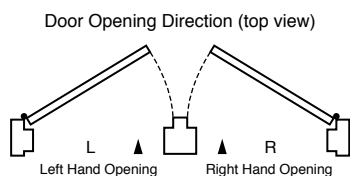


Remarks


1. If using on the wooden doors and frame: The door must be made of hard wood such as lauan or harder.
2. Surface treatment: By baked coating of melamine resin.
3. The tapping screws supplied with the products for fitting are 35mm long. In case of using the hinges on the wooden frame, make sure that the frame is thicker than 35mm.
4. Allow at least 5mm of space between the outer edge of door and the frame.
5. Always install a door stopper to prevent the door from opening more than 180°.

EXTERNAL DIMENSIONS


Left Hand Door

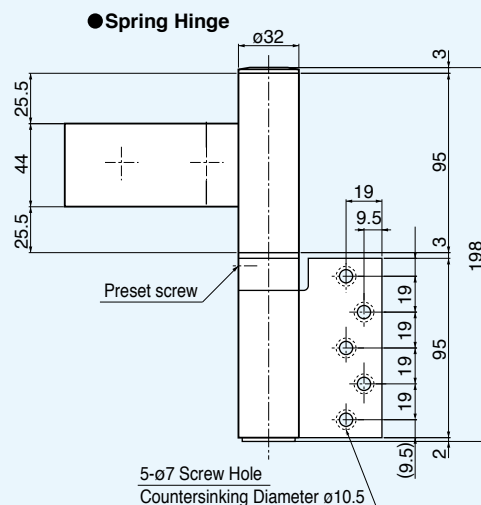


● Damper Hinge

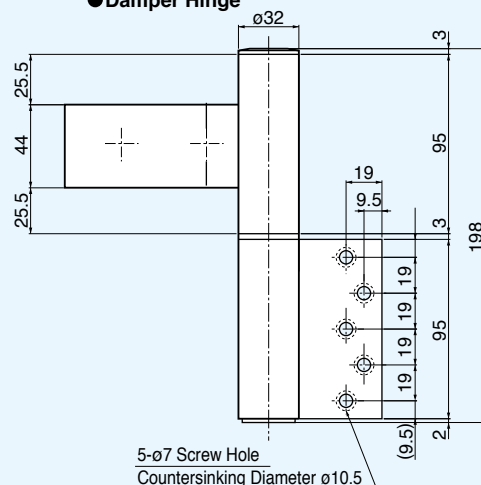

Right Hand Door

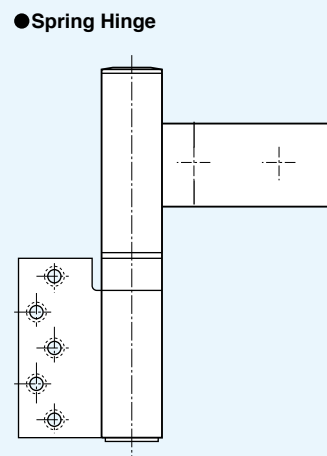

● Damper Hinge

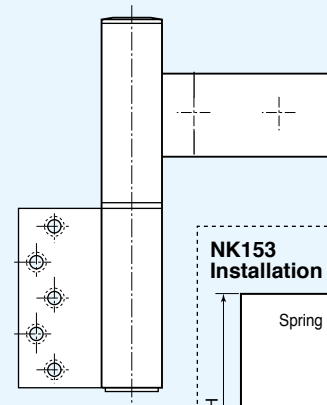

■ FITTING DIAGRAMS

